

iGU-10™

Fixed Wattage



PRODUCT SUMMARY

- Fixed Wattage
- Dimmable
- 3 Colour Temperatures
- Proprietary CrimpFin™ Heatsink Design
- 50,000 hour life, 5 year warranty
- Halogen MR form factor (ANSI compliant)
- No UV or IR radiation
- Voltage: 220VAC
- Socket Type: GU-10 Base
- Environment: Dry
- Length: 2.1 in, 53 mm
- Diameter: 2 in, 50 mm
- Weight: 1.8 oz, 50 g

The iGU™-10 lamps from MSi are fixed wattage LED replacement bulbs with the light output of halogen sources. The lamps bring the innovation and experience from multiple engineering disciplines to deliver a solution that is optimal for commercial, retail and residential applications.

iGU-10™

220~



2700K

3000K

4300K




Catalog#	Power	CCT (K)	CRI	Beam Spread	FWHM	Lumens	CBCP
iGU1027232D	5 W	2700	83	30°	23°	270	1,210
iGU1027322D			83	45°	32°		715
iGU1027442D			83	60°	44°		440
iGU1027602D			83	80°	60°		270
iGU1030232D	5 W	3000	83	30°	23°	300	1,310
iGU1030322D			83	45°	32°		775
iGU1030442D			83	60°	44°		475
iGU1030602N			83	80°	60°		295
iGU1043232D	5 W	4300	75	30°	23°	330	1,410
iGU1043322D			75	45°	32°		830
iGU1043442D			75	60°	44°		510
iGU1043602D			75	80°	60°		315

iGU-10™


CANDELA DISTRIBUTION

23°

3000K

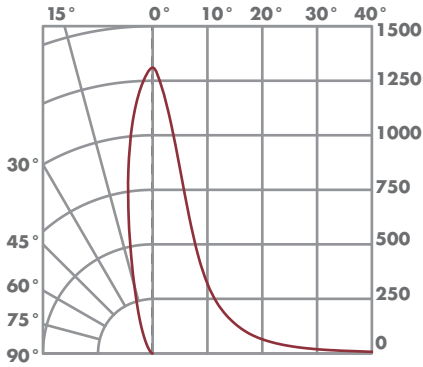

BEAM DISTRIBUTION


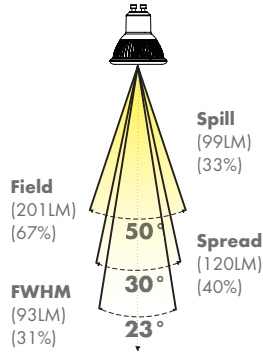


0° AIMING LUX

Distance To Floor (cms)	Beam Diameter (50% CBCP) (cms)	Lux On Floor
91	36.6	1571
183	73	387
274	112	172
366	146	96

32°



3000K

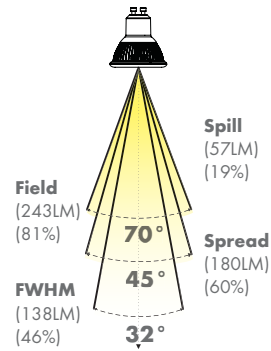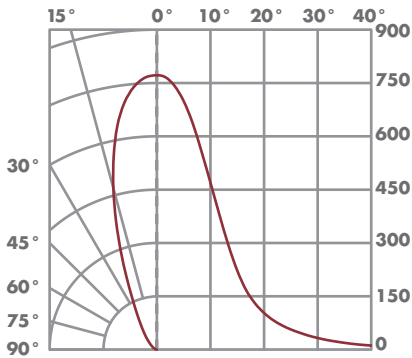

Distance To Floor (cms)	Beam Diameter (50% CBCP) (cms)	Lux On Floor
91	52	925
183	104	237
274	158	108
366	210	54

44°



3000K

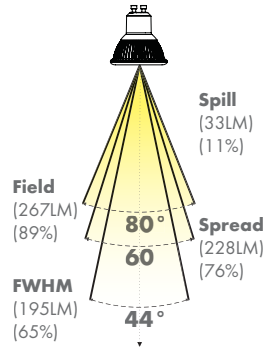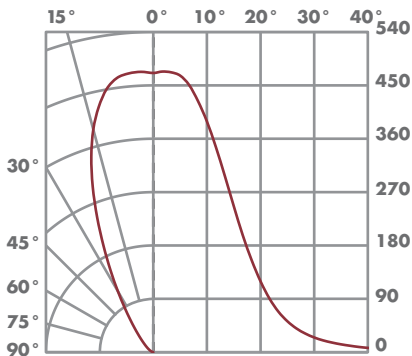

Distance To Floor (cms)	Beam Diameter (50% CBCP) (cms)	Lux On Floor
91	73	570
183	146	140
274	223	65
366	296	32

60°

3000K

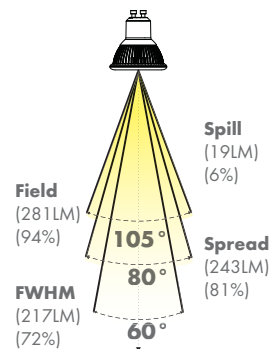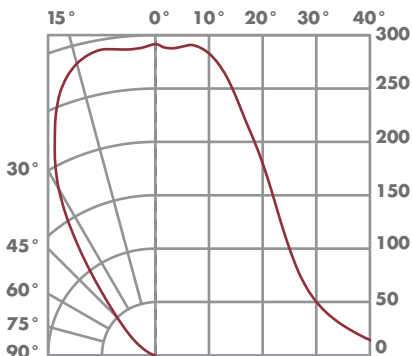

Distance To Floor (cms)	Beam Diameter (50% CBCP) (cms)	Lux On Floor
91	107	355
183	210	86
274	317	43
366	424	22

CAUTION: Risk of electric shock. Do not open - no user serviceable parts inside. Use in dry locations only. Turn power off before inspection, installation, or removal. Not intended for use with emergency exit fixtures or emergency exit lights. Not for use where exposed to the weather. Not for use in completely enclosed fixtures. Use only on 220 Volts, 50/60 Hz circuits.

WARRANTY: This product is covered by a 5 year limited warranty under normal operating conditions based on 12 hours of usage per day. For details please visit www.msissl.com/warranty.html.